




**SLATE  
SOLUTIONS**

**SVLII**

**Soft Armor**

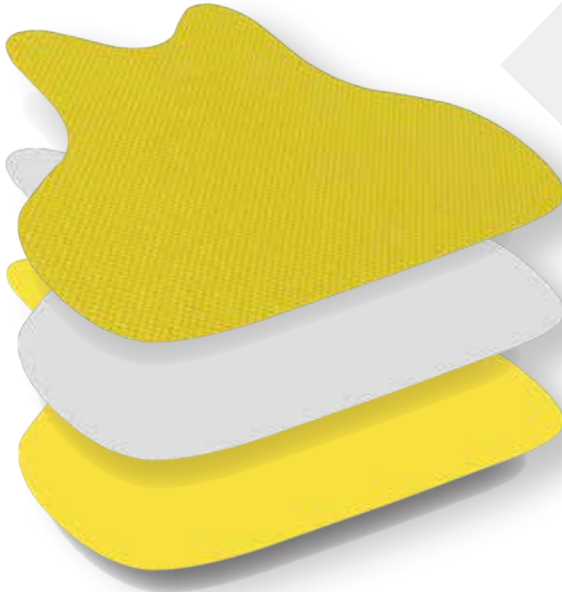

SHOWN IN DELTA CUT

## FEATURES

- ♦ The SVL series offers exceptional comfort, thinness, and top-tier ballistic performance. Tailored to offer operators an ideal blend of high performance and affordability, it serves as the ultimate solution. Moreover, it ensures heightened protection against a diverse range of special threats, making it a reliable choice for those operating in challenging environments.
- ♦ Covered with a 70d Nylon Rip Stop with TPU backing, heat sealed material.

## Specifications

Threat Level (NIJ 06)	II
Certification Sizes	C1 - C5
Weight (AD)	0.76 psf
Thinness (in)	0.16" (4.06mm)

## Certification Test Results

V50 - 9mm 124gr FMJ (new)	1820 ft/s (544m/s)
V50 - 9mm 124gr FMJ (conditioned)	1695 ft/s (516m/s)
P-BFS Avg. - 9mm 124gr FMJ	28.7 mm
V50 - 357mag 158gr JSP (new)	1679 ft/s (511m/s)
V50 - 357mag 158gr JSP (conditioned)	1623 ft/s (494m/s)
P-BFS Avg. - 357mag 158gr JSP	34.5 mm

## Special Threat Testing

V50 - 2gr RCC	2842 fps (866m/s)
V50 - 4gr RCC	2505 fps (763m/s)
V50 - 16gr RCC	2009 fps (612m/s)
V50 - 17gr FSP (.22cal)	1929 fps (587m/s)
V50 - 64gr RCC	1688 fps (514m/s)
V50 - 9mm 127gr SXT	1691 fps (515m/s)
P-BFS Avg. - 9mm 127gr SXT	35 mm
V50 - 40cal 165gr GDHP	1617 fps (492m/s)
P-BFS Avg. - 40cal 165gr GDHP	31 mm
V50 - 5.7x28mm 27gr SS195 HP	2337 fps (712m/s)
P-BFS Avg. - 5.7x28mm 27gr SS195 HP	17 mm
V50 - 5.7x28mm 40gr SS197 SR	2152 fps (655m/s)
P-BFS Avg. - 5.7x28mm 40gr SS197 SR	19 mm



**SLATE  
SOLUTIONS**

7060 W. State Road 84, Suite 12, Davie, FL 33317  
info@SlateSolutions.com | SlateSolutions.com

**754.200.6752**