




**SLATE
SOLUTIONS**

SVL IIIA FEMALE

Soft Armor

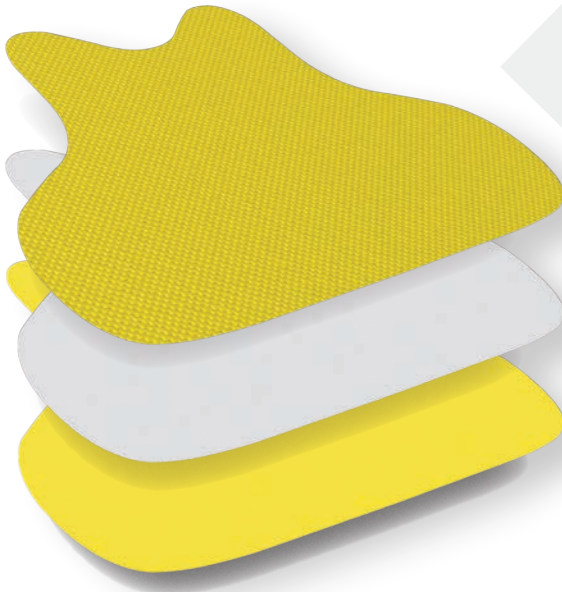

SHOWN IN DELTA CUT

FEATURES

- ◇ The SVL series offers exceptional comfort, thinness, and top-tier ballistic performance. Tailored to offer operators an ideal blend of high performance and affordability, it serves as the ultimate solution. Moreover, it ensures heightened protection against a diverse range of special threats, making it a reliable choice for those operating in challenging environments.
- ◇ Covered with a 70d Nylon Rip Stop with TPU backing, heat sealed material.

Specifications

Threat Level (NIJ 06)	IIIA
Certification Sizes	C1 - C5
Weight (AD)	0.99 psf
Thinness (in)	0.21" (5.33mm)

Certification Test Results

V50 - 357sig 125gr FMJ (new)	1882 ft/s (573 m/s)
V50 - 357sig 125gr FMJ (conditioned)	1790 ft/s (545 m/s)
P-BFS Avg. - 357sig 125gr FMJ	26.2 mm
V50 - 44mag 240gr SJHP (new)	1745 ft/s (531 m/s)
V50 - 44mag 240gr SJHP (conditioned)	1652 ft/s (503 m/s)
P-BFS Avg. - 44mag 240gr SJHP	36.8 mm

Special Threat Testing

V50 - 2gr RCC	3170 fps (966m/s)
V50 - 4gr RCC	2856 fps (870m/s)
V50 - 16gr RCC	2276 fps (693m/s)
V50 - 17gr FSP (.22cal)	2071 fps (631m/s)
V50 - 64gr RCC	1888 fps (575m/s)
V50 - 9mm 127gr SXT	1886 fps (574m/s)
P-BFS Avg. - 9mm 127gr SXT	26 mm
V50 - 40cal 165gr GDHP	1799 fps (548m/s)
P-BFS Avg. - 40cal 165gr GDHP	30 mm
V50 - 5.7x28mm 27gr SS195 HP	2704 fps (824m/s)
P-BFS Avg. - 5.7x28mm 27gr SS195 HP	31 mm
V50 - 5.7x28mm 40gr SS197 SR	2500 fps (762m/s)
P-BFS Avg. - 5.7x28mm 40gr SS197 SR	19 mm
V50 - 7.62x25mm TOK SJLC	2045 fps (547m/s)
P-BFS Avg. - 7.62x25mm TOK SJLC	24 mm



**SLATE
SOLUTIONS**

7060 W. State Road 84, Suite 12, Davie, FL 33317 USA
info@SlateSolutions.com | SlateSolutions.com

+1.754.200.6752