




# EXO IIIA

Soft Armor

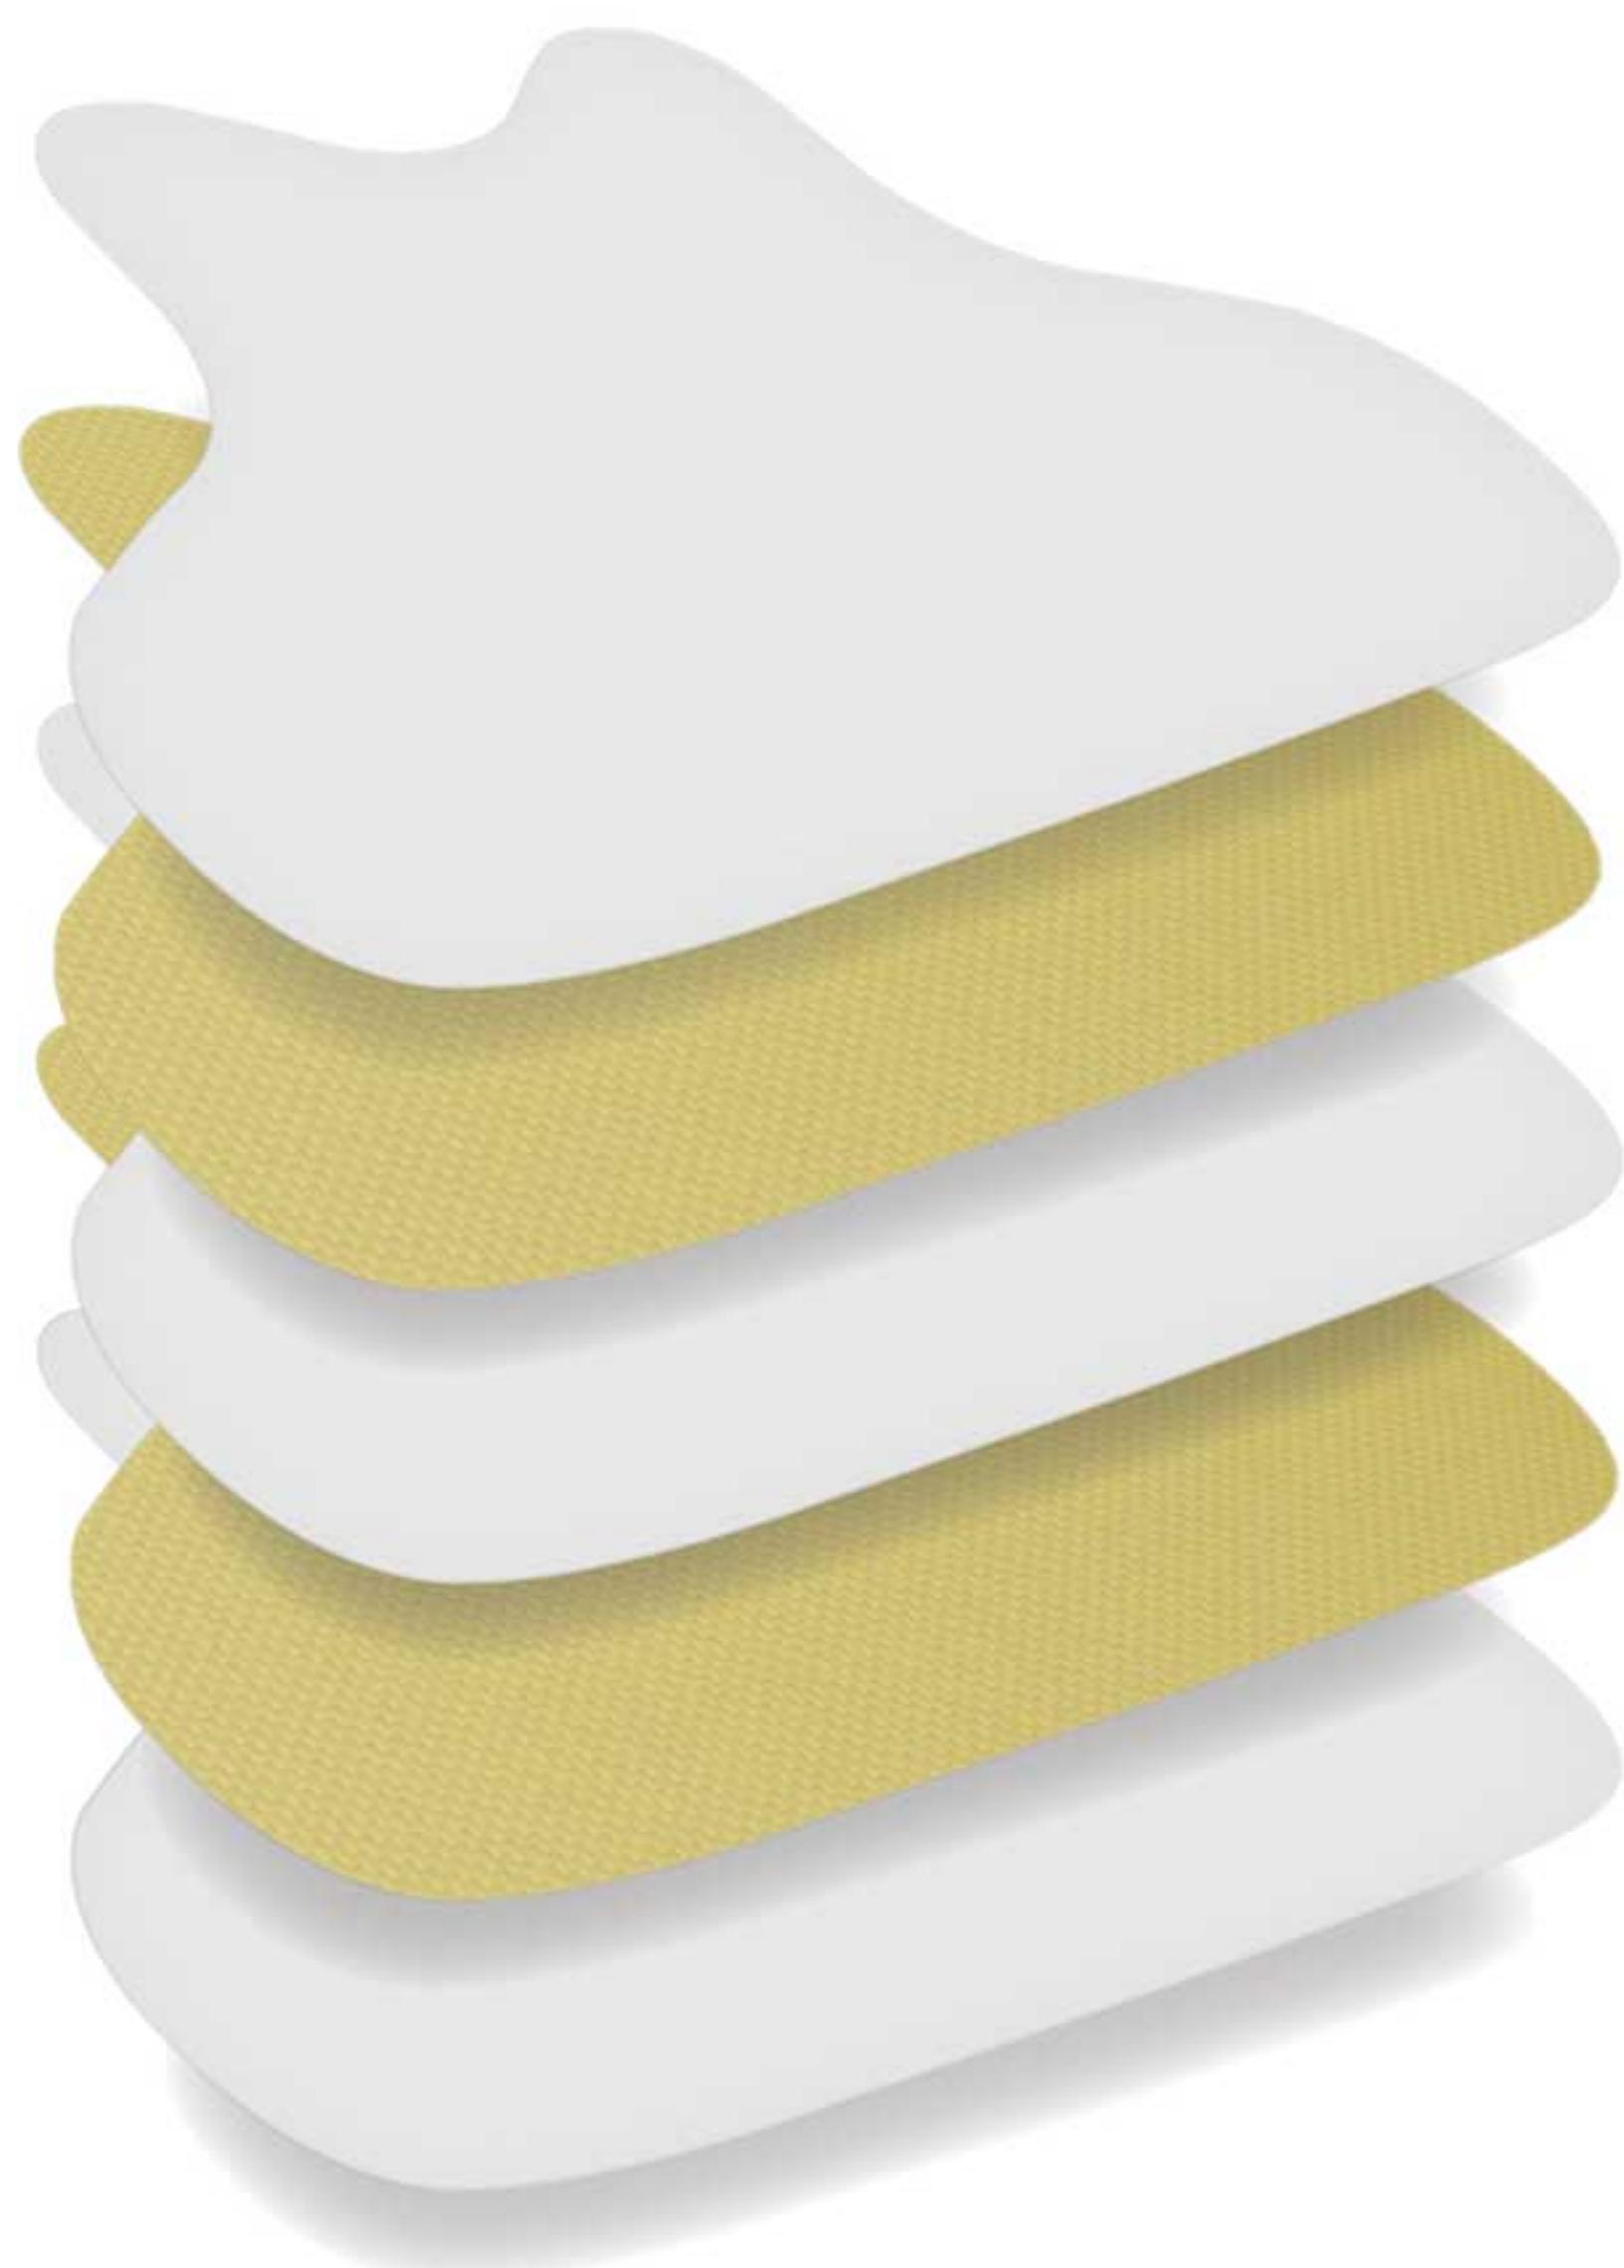

SHOWN IN DELTA CUT

## FEATURES

- ◊ The new EXO series represents our latest advancement in ballistic technology, engineered with the world's highest-performing soft armor materials. This cutting-edge design is among the thinnest, lightest, and most effective ballistic solutions available. Built with DuPont's Kevlar® EXO™ and Avient's 3rd Generation Dyneema (UHMWPE), this hybrid solution utilizes advanced design methodologies to deliver unmatched ballistic protection while ensuring exceptional flexibility.
- ◊ Covered with a 70d Nylon Rip Stop with TPU backing, the material is heat-sealed for enhanced durability and protection.

## Specifications

NIJ 0101.06 Threat Level	IIIA
NIJ Certification Sizes	C1 - C5
Weight	0.79 psf
Thickness	0.20"

## Certification Test Results

V50 - 357 SIG 125gr FMJ (new)	2030ft/s (619m/s)
V50 - 357 SIG 125gr FMJ (conditioned)	1961 ft/s (598m/s)
P-BFS Avg. - 357 SIG 125gr FMJ	26.5 mm
V50 - 44mag 240gr SJHP (new)	1868 ft/s (569m/s)
V50 - 44mag 240gr SJHP (conditioned)	1789 ft/s (545m/s)
P-BFS Avg. - 44mag 240gr SJHP	36.2 mm

\*Available for federal agencies only.



7060 W. State Road 84, Suite 12, Davie, FL 33317  
[info@SlateSolutions.com](mailto:info@SlateSolutions.com) | [SlateSolutions.com](http://SlateSolutions.com)

754.200.6752